

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date
28 April 2005 (28.04.2005)

PCT

(10) International Publication Number
WO 2005/037060 A3

(51) International Patent Classification⁷:

A61B 8/00

(74) Agent: ANDERSON, Ronald; Law Offices of Ronald M. Anderson, 600 108th Avenue NE, Suite 507, Bellevue, WA 98004 (US).

(21) International Application Number:

PCT/US2004/032427

(22) International Filing Date: 1 October 2004 (01.10.2004)

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:


60/508,554 3 October 2003 (03.10.2003) US

(71) Applicant (for all designated States except US): UNIVERSITY OF WASHINGTON [US/US]; 4311 11th Avenue NE, Suite 500, Seattle, WA 98105 (US).

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, ZW).

[Continued on next page]

(54) Title: TRANSCUTANEOUS LOCALIZATION OF ARTERIAL BLEEDING BY ULTRASONIC IMAGING

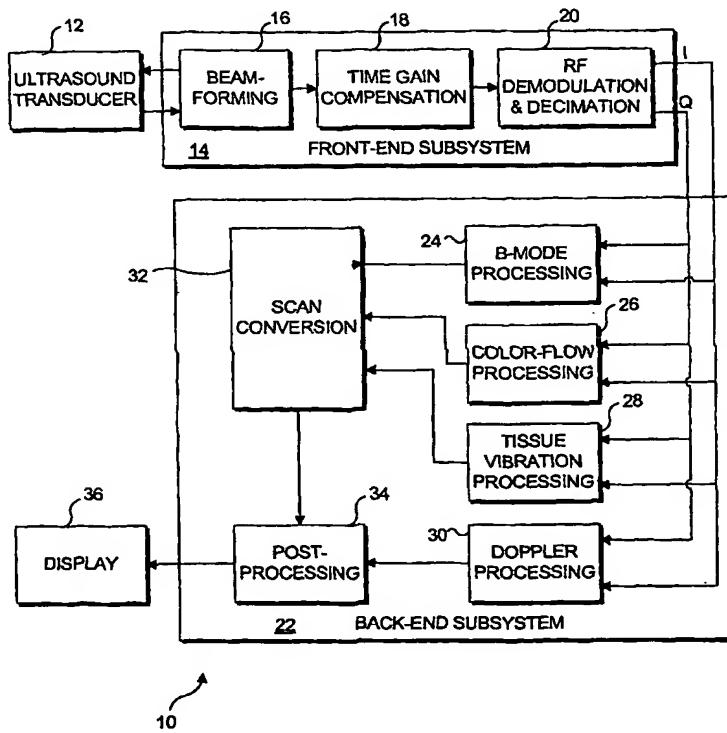

(57) Abstract: An ultrasound based technique for detecting and imaging vibrations in tissue caused by eddies produced during bleeding through punctured arteries or from organs. A clutter signal, normally suppressed in conventional color flow imaging, is employed to detect and characterize local tissue vibrations, to detect internal bleeding in an image, or as an audible or palpable signal, or a readout. Using a tissue vibration image, the origin and extent of vibrations relative to the underlying anatomy and blood flow can be visualized in real time, enabling measurements of vibration amplitude, frequency, and spatial distribution. Bleeding rate can be determined from the frequency and amplitude of the vibrations. Signal processing algorithms usable to identify tissue vibrations from an ensemble of 2D ultrasound data include those based on phase decomposition, spectral estimation using eigendecomposition, and spectral estimation using autoregressive modeling for isolating vibrations from clutter, blood flow, and noise.

WO 2005/037060 A3



SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

(88) Date of publication of the international search report:

25 August 2005